

## BILL OF MATERIAL FOR ONE APPROACH SLAB (2 REQ'D) BAR | NO. | SIZE | TYPE | LENGTH | WEIGHT #5 | STR | 41'-11" \* A1 | 23 | 1006 A2 | 46 #4 | STR | 21'-11" 673 #6 | STR | 10'-11" **★**B1 | 60 984 B2 60 #8 STR 1842 11'-6" \*B3 7 #5 | STR | 85 11'-7" \*B4 7 #5 | STR | 11′-3″ 82 \* B5 1 #5 5′-7″ **★**B6 1 #5 6′-11″ #5 STR **★** S1 | 48 3′-5″ 171 #5 **★** S2 | 48 213 4'-3" \*S3 | 20 | #5 50 2'-5" 2515 REINFORCING STEEL LBS. \* EPOXY COATED REINFORCING STEEL LBS. 2604 CLASS AA CONCRETE BREAKDOWN POUR 1 SLAB 14.2 C. Y. 2.2 POUR 2 RAIL C.Y. CLASS AA CONCRETE C. Y. 16.4

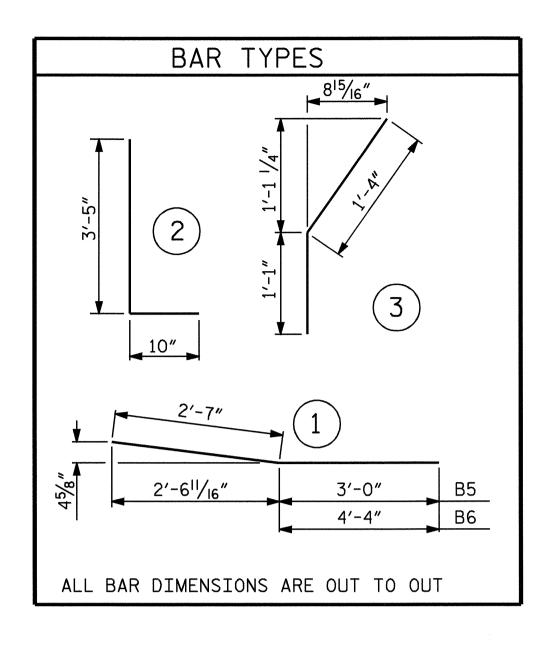

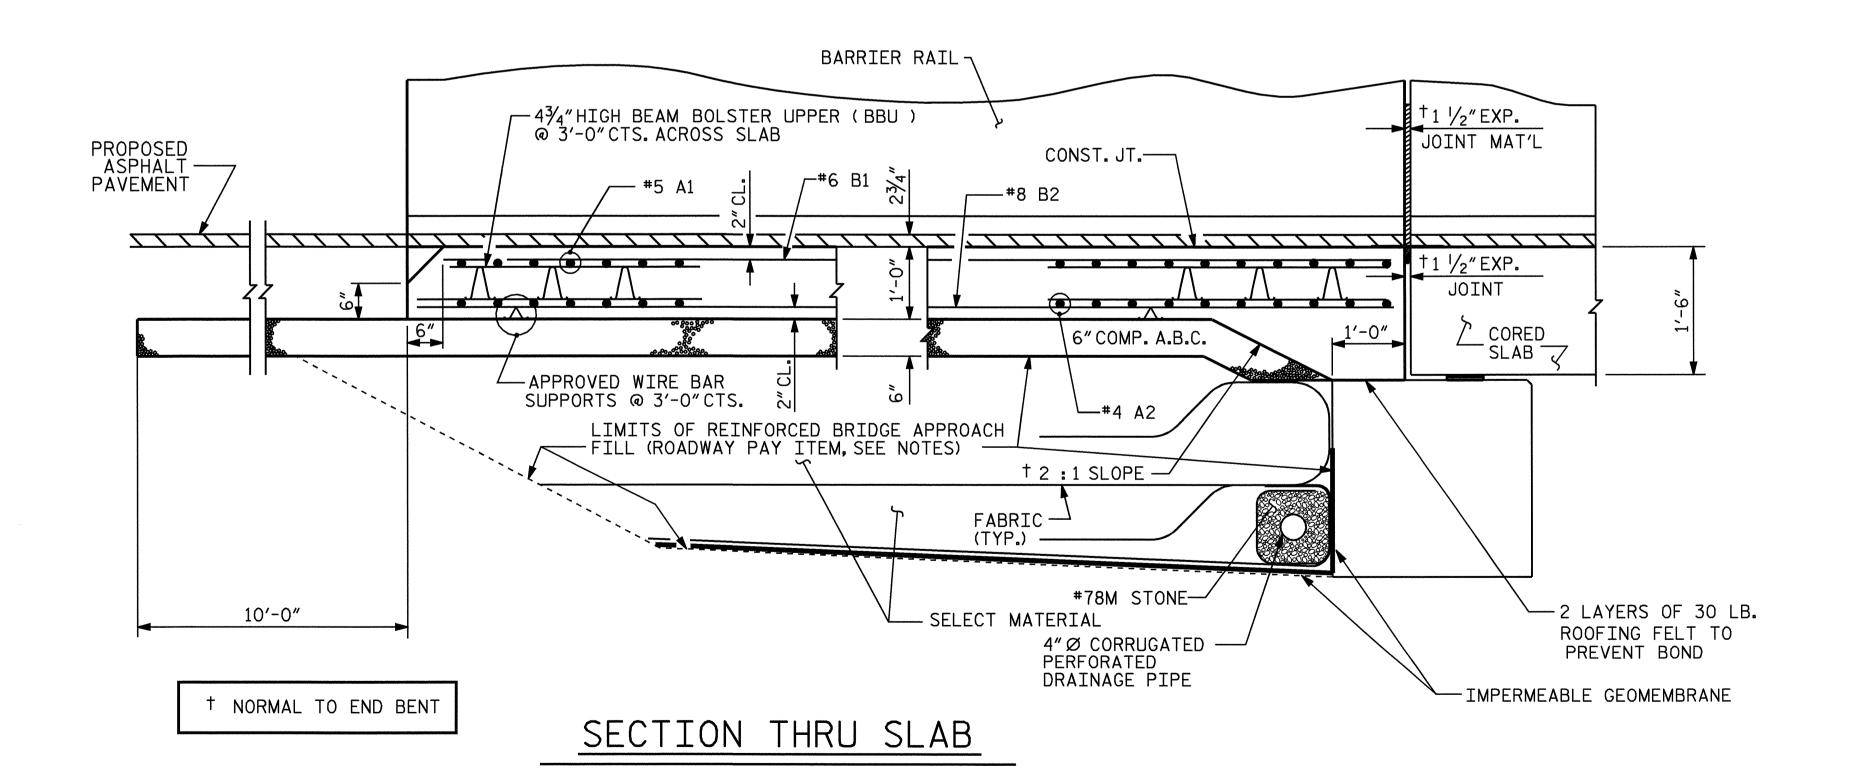

NOTES

THE COST OF THE BARRIER RAIL ON THE APPROACH SLAB SHALL BE INCLUDED IN THE LUMP SUM CONTRACT PRICE BID FOR BRIDGE APPROACH SLABS.

FOR REINFORCED BRIDGE APPROACH FILL INCLUDING FABRIC, IMPERMEABLE GEOMEMBRANE, 4" Ø DRAINAGE PIPE, #78M STONE, AND SELECT MATERIAL, SEE ROADWAY PLANS.

TEMPORARY DRAINAGE AND TEMPORARY BERM AND SLOPE DRAINS WILL BE PAID FOR UNDER THE LUMP SUM PRICE FOR BRIDGE APPROACH SLAB.

AREA BETWEEN THE WINGWALL AND APPROACH SLAB SHALL BE GRADED TO DRAIN THE WATER AWAY FROM THE FILL FACE OF THE BRIDGE AND SHALL BE PAVED. SEE ROADWAY PLANS.

THE 6"COMP. A.B.C. SHALL EXTEND 10'-0"BEYOND THE END OF THE APPROACH SLAB AND 1'-0"OUTSIDE OF EACH EDGE OF SLAB.

THE CONTRACTOR MAY USE 4"TYPE B-25.0B ASPHALT CONCRETE BASE COURSE IN LIEU OF 6"COMP. A.B.C. IF THIS OPTION IS USED, THE BASE COURSE SHALL EXTEND 1'-0"BEYOND THE END OF THE APPROACH SLAB AND THE WIDTH SHALL BE THE SAME AS THAT OF THE APPROACH SLAB.

THE CONTRACTOR MAY USE 5"CLASS "A" CONCRETE BASE IN LIEU OF 6" COMP. A.B.C. IF THIS OPTION IS USED, THE CONCRETE BASE SHALL EXTEND 1'-O"BEYOND THE END OF THE APPROACH SLAB AND THE WIDTH SHALL BE THE SAME AS THAT OF THE APPROACH SLAB. THE CONCRETE SHALL BE FINISHED TO A SMOOTH SURFACE AND A LAYER OF 30 LB ROOFING FELT SHALL BE PLACED BETWEEN THE CONCRETE BASE AND THE APPROACH SLAB TO PREVENT BOND. THE APPROACH SLAB SHALL NOT BE CAST UNTIL THE CONCRETE BASE HAS REACHED AN AGE OF THREE CURING DAYS.

FOR JOINT DETAILS, SEE "PRESTRESSED CONCRETE CORED SLAB UNIT" SHEETS.

THE JOINT AT THE END BENT SHALL BE SEALED AS SOON AS PRACTICAL AFTER THE CONSTRUCTION OF THE APPROACH SLABS.

APPROACH SLAB GROOVING IS NOT REQUIRED.

PROJECT NO. B-3926

WATAUGA COUNTY

STATION: 32+85.50 -L2-

SHEET 2 OF 4

STATE OF NORTH CAROLINA

DEPARTMENT OF TRANSPORTATION

RAL FIGH

STANDARD

BRIDGE APPROACH SLAB FOR PRESTRESSED CONCRETE CORED SLAB WITH BARRIER RAIL

			·			SHEET NO.
	REVISIONS					
NO.	BY:	DATE:	NO.	BY:	DATE:	S-34
1			3			TOTAL SHEETS
2			4			36

ASSEMBLED BY: B.N. GRADY DATE: 7/04
CHECKED BY: A.R. CHESSON DATE: 8/04

DRAWN BY: LES 8/01
CHECKED BY: RDR 8/01
REV. 10/17/00
REV. 7/10/01
REV. 5/7/03R
RWW/JTE

